

10/23/00
JC927 U.S. PTO

10-25-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on October 23, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL631004043US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Attorney Docket No.: KLA1P012

First Named Inventor: LEE

JC932 U.S. PTO
09/695726
10/23/00


Mandy Franklin

UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))
(Regular application claiming priority of a provisional)

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
SHING LEE, PH.D.

For: **FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY MICROANALYSIS**

Priority of U.S. Provisional Application No. 60/210,337 filed on June 7, 2000 is claimed under 35 U.S.C. § 119(e).

Application Elements:

- ☒ **24** Pages of Specification, Claims and Abstract
- ☒ **9** Sheets of formal Drawings
- ☐ Combined Declaration and Power of Attorney
- ☐ Separate Declaration

Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ Separate Power of Attorney by Assignee
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☒ Information Disclosure Statement with Form PTO-1449
 - ☒ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard

- ☐ Small Entity Statement(s)
☐ Other:

Claim For Foreign Priority

☐ Priority of _____ Application No. _____ filed on _____
is claimed under 35 U.S.C. § 119.

☐ The certified copy is enclosed.

☐ The certified copy will follow.

☐ Amend the specification by inserting before the first line the sentence:

“This application claims the benefit of U.S. Provisional Application No. _____
filed on _____, the disclosure of which is incorporated herein by reference.”

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 500388 (Order No. KLA1P012).

☒ Please send correspondence to the following address:

Customer Number 022434
BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778
Telephone (650) 961-8300
Fax (650) 961-8301



Date: 10/23/00

Phillip P. Lee
Registration No. 46,866

APPLICATION FOR UNITED STATES LETTERS PATENT

FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY
MICROANALYSIS

Inventors:

Shing Lee, Ph.D.
45080 Parkmeadow Drive
Fremont, California 94539
Citizen of the United States of America

Assignee: KLA-Tencor Corporation

Entity: Large

BEYER WEAVER & THOMAS, LLP
P.O. Box 778
Berkeley, CA 94704-0778

Telephone: (650) 961-8300
Facsimile: (650) 961-8301

FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY MICROANALYSIS

5

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority of U.S. provisional patent application No. 60/210,337, filed June 7, 2000, entitled "FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY MICROANALYSIS," which is hereby incorporated by reference.

10

FIELD OF THE INVENTION

The present invention relates generally to X-ray microanalysis, and more specifically, to the application of X-ray analysis to measure film stack characteristics on semiconductor devices.

BACKGROUND

15

Generally, the industry of semiconductor manufacturing involves highly complex techniques for integrating circuits into semiconductor materials. Due to the large scale of circuit integration and the decreasing size of semiconductor devices, the semiconductor manufacturing process is prone to processing defects. Testing procedures are therefore critical to maintain quality control. Since the testing procedures are an integral and significant part of the manufacturing process, the semiconductor industry constantly seeks more accurate and efficient testing procedures.

20

A critical aspect of semiconductor fabrication involves the formation of the multiple conductive layers and liner layers. Each conductive layer includes the metal traces which form the paths along which electronic signals travel within semiconductor devices. Each of the conductive layers, are separated by a dielectric material layer and a liner layer. The dielectric material layer, commonly silicon dioxide, provides electrical insulation between the conductive layers. Portions of each conductive layer are connected to portions of other conductive layers by electrical pathways called "plugs." The liner layers are formed between

25

each conductive layer and each dielectric material layer to prevent the conductive material from diffusing into the dielectric material layer. The liner layer inhibits a conductive layer from diffusing into an underlying dielectric and shorting circuiting with an adjacent conductive layer. Of course, such short circuit formations are likely to be detrimental to semiconductor performance. In particular note, copper, a common conductive material used in semiconductor devices, diffuses very aggressively into silicon dioxide. The thickness and composition of the conductive and liner layers must be formed under extremely small margins of error. Thus, systems capable of testing the characteristics of these layers are very important.

Some of the current methods for measuring film stack characteristics include a four-point probe test system, eddy current testing, X-ray fluorescence testing, photo-induced surface acoustic wave testing, and X-ray micrography techniques using a single energy dispersive detector (EDS) and/or a single wave length dispersive detector (WDS).

Unfortunately, each of these methods have associated disadvantages which limit their usefulness. For example, the four-point probe test system requires the destruction of the specimens. The eddy current test has difficulty resolving film stack thickness and also has a spot size which is relatively large as compared to areas of interest on a semiconductor device. X-ray fluorescence testing is also limited by a large spot size. X-ray fluorescence also has difficulty distinguishing different film stacks thickness, generally results in poor measurements, and is a time consuming process. It is important for the testing speeds to keep pace with the increasing fabrication speeds so that the goals of maximizing manufacturing throughput may be achieved. A specific problem with photo-induced surface acoustic wave methods is that it has difficulty resolving the thickness of copper layers; copper being a common conductor used in semiconductors. In addition to their specific problems, the above mentioned methods generally cannot accurately measure characteristics of a film stack which has multiple layers.

An EDS system is described in U.S. Patent No. 4,675,889 by Wood et al., which is incorporated herein in its entirety. EDS systems are typically capable of collecting and counting X-ray photons for specific wide ranges of energy. Specific materials will be expected to have specific peak photon counts at specific energy levels. Although an EDS system may be adequate for measuring a single thin film, this system does not work well for measuring multiple films (*e.g.*, such as a conductive layer and an underlying liner layer).

Since EDS systems have relatively low associated signal to noise ratios, some or all of the peaks are not measured accurately or not detected at all. For example, when the number of X-ray photons for a particular material type are expected to peak at two energy levels that differ from each other by a relatively small amount, the two peaks are likely to be collected together within an energy range that includes both peak energy levels. Additionally, if one of the peaks is significantly smaller than the other peak, only the larger peak will be detected. A system utilizing a single WDS detector detects X-ray photons having a specific energy level. A drawback to the single WDS system is that the single WDS detector must be reconfigured each time it is desired to detect X-ray photons having a different energy level. This slows the testing process for a film stack of an integrated circuit since the WDS must be reconfigured for each sample type, and if desired, for each of the various characteristic emission levels for each sample.

Currently there is no satisfactory method capable of testing a pattern semiconductor wafer in a non-destructive manner, with a high degree of accuracy, having a high throughput, and with a relatively small spot size. In order for the semiconductor fabrication industry to achieve higher goals of manufacturing throughput, a system capable of testing film stacks having the above listed traits would be desirable.

SUMMARY

Accordingly, the present invention provides a non-destructive semiconductor testing system capable of efficiently measuring the composition and/or thickness of one or more layers within a film stack with a high degree of accuracy. In general terms, the present invention includes mechanisms for inducing X-ray emissions from a sample under test. The sample under test may have multiple film layers, such as conductor, insulator, and liner layers. In a specific embodiment, a charged particle beam is used to induce X-rays to emanate from one or more films on a semiconductor device. The charged particle beam penetrates at least two film layers (*e.g.*, one conductive layer and one liner layer) of the film stack so that X-rays are produced in these penetrated layers. At least a portion of the X-rays are detected using one or more X-ray detectors that each detect X-ray photons having one or more specific energy levels. The X-rays may then be analyzed to determine characteristics of the penetrated layers, such as composition and thickness.

In one embodiment, an apparatus for measuring film stack characteristics on an integrated circuit is disclosed. The apparatus includes an electron beam generator that is configurable to direct an electron beam towards the integrated circuit such that the electron beam penetrates at least a conductive film layer and a liner film layer of the integrated circuit. The electron beam thereby cause X-rays to emanate from the integrated circuit. The apparatus further includes X-ray detectors positioned above the integrated circuit so as to detect at least a portion of the X-rays emanating from the integrated circuit. Preferably, each of the multiple X-ray detectors are wavelength dispersive system (WDS) detectors. This embodiment appears to have a relatively high degree of accuracy (*i.e.*, 0.5%).

In another aspect, the invention pertains to a method for measuring film stack characteristics on a semiconductor device. An electron beam is directed towards the semiconductor device so that the electron beam penetrates at least a conductive film layer and a liner layer. At least a portion of the X-rays which are caused to emanate from the device are detected with multiple X-ray detectors which detect X-ray photons having a specific energy level. In a preferred embodiment, each of the multiple X-ray detectors are WDS detectors. A reflective surface within each WDS is positioned to focus X-rays of a predetermined energy level upon a sensor within each WDS. In other words, each WDS is configured to detect X-rays at a specific energy level. In yet another aspect, data obtained from the detected X-rays is

collected and analyzed. The present invention also provides a computer-readable medium containing computer code for performing the above described method.

In alternative method and in computer-readable medium embodiments, at least one property of a film stack is determined using raw data (*e.g.*, measured X-ray counts) associated with the film stack. A set of film stack characteristic values (*e.g.*, thickness and/or compositions of a conductive and liner layer) are selected and used to generate predicted data (*e.g.*, predicted X-ray counts at one or more specific energy levels) by solving equations which model the film stack. A new set of film stack characteristic values are selected when the difference between the predicted data and the raw data is larger than a certain margin of error. When the difference between the predicted data and the raw data is less than the margin of error, the selected characteristic values are believed to be a sufficiently accurate measurement of the actual characteristic values. In a specific embodiment, the raw and predicted data represent count values of X-rays at specific energy levels, and the film stack characteristic values represent a thickness and a composition value of the film layers in the film stack.

These and other features and advantages of the present invention will be presented in more detail in the following specification of the invention and the accompanying figures which illustrate by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with further advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

5 FIG. 1 illustrates an X-ray photon incident upon a specimen, and a resulting X-ray photon being emitted by the specimen material.

FIG. 2A illustrates the incident X-ray photon of FIG. 1 impacting an atom of the specimen, and the resulting ejection of an electron the innermost K electron shell of the atom.

10 FIG. 2B illustrates an electron in the L electron shell of the atom of the specimen of FIG. 2A filling the vacancy created in the K electron shell, and the simultaneous emission of the secondary X-ray photon.

FIG. 3 illustrates an electron beam induced X-ray microanalysis test system according to one embodiment of the present invention.

15 FIG. 4 illustrates a typical scanning electron microscope in accordance with one embodiment of the present invention.

FIG. 5 illustrates a cross-sectional view of a wavelength dispersive system (WDS) X-ray detector of FIG. 3 in accordance with one embodiment of the present invention.

FIG. 6 illustrates a cross-sectional view of an alternative and preferred embodiment of the WDS X-ray detector.

20 FIG. 7 shows a flow diagram representing a procedure for measuring film stack characteristics on a semiconductor wafer in accordance with one embodiment of the present invention.

FIG. 8A illustrates a graph representing the depths to which an electron beam will penetrate depending upon the electron beam energy level.

25 FIG. 8B illustrates a graph representing how the electron beam penetration depth varies with an element's atomic number while at a constant energy level.

FIG. 9 illustrates a graph representing the counts detected for the K shell emission levels for a copper layer as the thickness of a copper layer increases.

FIG. 10 illustrates a graph representing the counts detected for the K shell emission levels for a Tantalum layer as the thickness of a copper layer, formed above the Tantalum layer, increases.

FIG. 11 illustrates a flow diagram representing a procedure for determining film stack characteristic values in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will be described in detail with reference to a few specific embodiments thereof as illustrated in the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order to not unnecessarily obscure the present invention.

In general terms, X-ray micrography includes analysis of the X-ray region of the electromagnetic spectrum that is associated with a sample so as to gain information regarding the sample. The X-ray region of the electromagnetic spectrum includes frequencies that range from 1.0×10^{17} Hz to 1.0×10^{21} Hz. X-ray micrography is performed by bombarding a specimen with electrically charged particles which have sufficient energy to cause X-ray photons to be emitted from the specimen. By counting the emitted photons at one or more energy levels, the composition and thickness of conductive layers in a semiconductor device may be determined. The composition of a material may be determined since the specific energy levels of X-ray photons emitted from such material are related to the material's composition. For example, the thickness of a conductive layer may be determined by taking the integral of the number of X-ray photons around the characteristic energy emission levels. The integral taken is directly proportional to the thickness of the conductive layer. The actual thickness of a metal layer is then determined by applying a calibration factor, which is specific to each type of material being measured, to the count data. Procedures for determining composition and thickness of layers within a film stack are described further below with reference to FIGS. 7 through 10.

FIGS. 1, 2A, and 2B illustrate generally how X-ray photons may be caused to emanate from a specimen in accordance with one implementation of the present invention. FIG. 1 illustrates a charged particle 10, such as an electron, colliding with the surface of a specimen 12. The charged particle may collide with an atom of the specimen 12 and thereby causes an X-ray photon 14 to be emitted from the specimen 12. FIG. 2A and 2B illustrate this collision event at the atomic level. FIG. 2A shows an atom 16 of the specimen 12. The atom 16 has a

nucleus 18 surrounded by electrons 20 at different discrete distances from nucleus 18 called electron shells. A given electron shell has a binding energy level equal to the amount of energy required to remove an electron from the electron shell. The binding energy level of an electron shell is inversely proportional to the distance of the electron shell from the nucleus.

- 5 The innermost electron shell of an atom is called the K shell, and has the highest binding energy associated with it. In FIG. 2A, K-shell electron 22 is located in K shell 24. The two shells beyond the K shell are the L and M shell, the M shell being the farthest away from the nucleus 18.

FIG. 2A also shows the charged particle 10 impacting atom 16 within the specimen 12.

- 10 If the energy level of the particle 10 is greater than the binding energy level of a K-shell 24, the entire energy of the particle 10 is absorbed by atom 16 and one of the electrons in K shell 24 is ejected from the atom 16. As depicted in FIG. 2A, K-shell electron 22 is ejected from atom 16 after particle 10 is absorbed by atom 16.

- 15 With a vacancy in K shell 24, atom 16 is energetic and unstable. The most probable stabilization mechanism is the filling of the vacancy in K shell 24 by an electron located in an electron shell with a lower binding energy level. As shown in FIG. 2B, an L-shell electron 26 in L shell 28, which is farther from nucleus 18 than K shell 24, may fill the vacancy in K shell 24. As L-shell electron 26 fills the vacancy in K shell 24, atom 16 may simultaneously emit an X-ray photon 14 with energy $(N_K - N_L)$, where N_K and N_L are the binding energy levels of
20 K and L shell, respectively. With a vacancy now in L shell 28, ionized atom 16 is more stable and less energetic.

- The above described X-ray emission theory may be utilized to determine the composition and thickness of films within a film stack since X-ray emissions from the film stack depend on the film stack's composition and thickness values. That is, each material type
25 has an associated atomic shell arrangement. Additionally, the binding energy level for each shell varies with material type. For example, a first material type emits X-rays at energy levels that differ from energy levels of a second material type. In other words, each material type has associated X-ray energy peaks at which X-rays are expected to be emitted. Thus, an unknown material's composition may be determined by comparing the unknown material's X-
30 ray energy peaks with a known material's energy peaks. When a match is found, the unknown material is identified as having the same composition as the matching material.

FIG. 3 illustrates a system utilizing an electron beam induced X-ray microanalysis test system according to one embodiment of the present invention. The system represented in FIG. 3 includes a beam generator 400, which directs a charged particle beam at the specimen 330. The typical spot size of the system is approximately 10 microns in diameter. However, the spot size may range between 1-100 microns in diameter. The specimen 330 is a multi-layered semiconductor wafer for which layer thickness and composition measurements are desired. X-ray detectors 500 are positioned above the specimen 330 in order to collect the X-ray photons emitted from the specimen 330. Each of the X-ray detectors are coupled with an analysis unit 320. The analysis unit 320 can be configured to analyze the data collected by the X-ray detectors 500 and to generate useful information concerning the individual layers. The analysis unit 320 may take the form of any suitable processing or computing system, such as a workstation.

The beam generator 400 may be any suitable device that directs charged particles towards a specimen, and which, in turn, causes X-rays to emanate from the sample under test. The generator 400 is capable of projecting the charged particles with sufficient energy to penetrate at least two layers of the film stack on a integrated circuit. By way of example, a conductive layer and a liner layer may be two of the film stack layers penetrated by the beam generator 400. Preferably, the particles penetrate substantially through the entire conductive and liner layers so as to cause X-rays to emanate from the entire width of the respective layers. As a result, X-ray measurements from the entire thickness of the penetrated layers may then be taken. By way of example, the beam generator 400 may take the form of a scanning electron microscope (SEM). Figure 4 is a diagrammatic representation of a typical scanning electron microscope (SEM) system 400. As shown, the SEM system 400 includes an electron beam generator (402 through 416) that generates and directs an electron beam 401 substantially toward an area of interest on a specimen 424. The SEM system 400 also includes a detector 426 arranged to detect charged particles 405 (secondary electrons and/or backscattered electrons) emitted from the specimen 424.

As shown, the electron beam generator includes an electron source unit 402, an alignment octupole 406, an electrostatic predeflector 408, a variable aperture 410, a wien filter 414, and a magnetic objective lens 416. The source unit 402 may be implemented in any suitable form for generating and emitting electrons. For example, the source unit 402 may be in the form of a filament that is heated such that electrons within the filament are excited and

emitted from the filament. The octupole 406 is configured to align the beam after a particular gun lens voltage is selected. In other words, the beam may have to be moved such that it is realigned with respect to the aperture 410.

The aperture 410 forms a hole through which the beam is directed. The lower quadrupole 408 may be included to compensate for mechanical alignment discrepancies. That is, the lower quadrupole 408 is used to adjust the alignment of the beam with respect to any misaligned through-holes of the SEM through which the beam must travel. The magnetic objective lens 416 provides a mechanism for accelerating the beam towards the sample. Finally, the Wien filter 414 deflects secondary electrons towards the detector 426.

The specimen or sample 330 may take a variety of forms for which certain measurements are desired. Specifically, the electron beam induced X-ray microanalysis test system may be used to measure the film characteristics of various thin film devices such as a semiconductor wafer or a magnetic recording head. In the illustrated embodiment, the specimen 330 is a semiconductor wafer which contains alternating conductive 340, dielectric 360, and liner 350 layers formed on a substrate of semiconductor material. The wafer 330 includes multiple conductive layers 340 which couple devices (*e.g.*, transistors and capacitors) within a semiconductor device. Portions of each conductive layer 340 are typically coupled to an adjacent conductive layer portion 340 through a connection path called a "plug" 370. Typically, the conductive layer is typically about 10,000 Angstroms in thickness. Each conductive layer 340 is also separated by a dielectric material layer 360. The dielectric material, for example silicon dioxide, electrically insulates each conductive layer 340 to prevent unwanted short circuits. At the beginning of the fabrication process, the conductive layers have initial thicknesses of 1000 Angstroms. During the fabrication process, additional materials are added to form the conductive layers and therefore result in conductive layers having thickness of approximately 10,000 Angstroms. In some implementations of the test system, the initial and final thicknesses of the conductive layers will be measured.

Since conductors, such as Cu, may easily diffuse into the adjacent dielectric layers 360, a thin liner layer 350 is formed between the conductive layers 340 and the dielectric layers 360. The liner layers 350 prevent each conductive layer 340 from diffusing into the dielectric layer and shorting with an adjacent conductive layer. Such a short may be detrimental to the proper operation of the semiconductor device. Any suitable liner layer material may be utilized to prevent a conductive layer from diffusing into an adjacent

conductive layer. For example, a liner layer of Tantalum or Tantalum-Nitride may be used. The liner layer may have any suitable thickness, such as 300 Angstroms. The formation of the conductive and liner layers are monitored closely since they affect semiconductor device operation. The microanalysis system of the present invention is advantageously capable of
5 measuring at least one conductive layer 340 and at least one liner layer 350 of a semiconductor wafer.

Any suitable detector for measuring X-rays at specific energy levels may be utilized. FIG. 5 illustrates a cross-sectional view of a wavelength dispersive system (WDS) X-ray detector in accordance with one embodiment of the present invention. Each X-ray detector
10 500 includes a housing 530 having an aperture 535. Although preferred, the housing and aperture are optional and are not required for practicing the techniques of the present invention. An electron beam 545 is directed to a focus point 550 on a thin film device 555 (i.e., a semiconductor wafer). The electron beam 545 causes photons 540 to emanate from the focus point 550. The aperture 535 permits a limited amount of photons 540 to enter each
15 detector 500. Upon entering the detector 500, each photon travels along a path to a concave reflective surface 510. The reflective surface 510 directs a portion of photons to a sensor 520. The reflective surface 510 is designed and positioned so that only photons with a specific energy level are directed to the sensor 520. The reflective surface 510 may be positioned to direct only photons with an energy level characteristic of a certain material to facilitate a film
20 characterization process. By detecting photons of only a specific energy level, detector 500 is capable of obtaining high signal to noise ratios. It should be noted that the reflective surface may be a Bragg reflector or a crystal capable of directing photons towards the sensor.

A cross-sectional view of an alternative and preferred embodiment of a WDS X-ray detector 500' is illustrated in FIG. 6. Detector 500' has a collimator 560 that captures the
25 photons 540 emanating from the focus point 550, and then through its reflective surfaces causes the photons 540 to travel in substantially parallel paths. The collimator 560 is generally made from metal foil material. The photons then reflect off of a substantially flat reflective surface 565 such that the photons 540 continue in parallel paths towards the sensor 520. Similarly with detector 500, the reflective surface 565 in detector 500' may also be
30 Bragg reflector or a crystal.

A common device which contains the general elements of the detector 500 and 500' is a Wavelength Dispersive System (WDS). By utilizing multiple WDS detectors, one or more
KLA1P012/MRO/PPL

photon peaks may be detected for each type of material that is expected to be present within the measured film stack of the specimen. That is, characteristic emission levels for one or more types of material in the film stack may be measured. One or more individual detectors may also be dedicated to detect the various characteristic emission levels for each type of material. For example, two WDS detectors may be dedicated for detecting two peaks associated with a copper material. As described earlier each material has emission levels characteristic of photons released due to an electron falling from each of the K, L, or M shells. By using multiple WDS detectors, the test system is able to obtain information for each of a multiple number of film layers.

Another type of detector, an Energy Dispersive System (EDS), collects photons in a wide spectrum of energies. EDS are capable of collecting a greater range of signals. As a result however, EDS detectors also collect photons having energies surrounding the characteristic photon energies. This causes EDS detectors to have lower signal to noise ratios.

The test system of the illustrated embodiment is capable of obtaining measurements having precision within 0.5% accuracy. Film stack thickness measurements may also be made within two seconds if the electron beam current is increased to approximately 1.0×10^{-5} Amps. Thus, this test system allows for both accurate testing at a high throughput rate.

FIG. 7 illustrates a flow diagram representing one particular implementation of a method for measuring film stack characteristics on a semiconductor wafer. Initially, electron beam 400 parameters are set in operation 610. Parameters such as the electron beam current and voltage are set so that the electron beam has a landing energy sufficient for the beam to penetrate at least one conductive layer and one liner layer. Landing energy is defined as the energy at which the beam hits the specimen. In addition to the beam current and voltage, the scan pattern of the electron beam may affect the charge distribution of on the specimen 330, and thus, affect how the information is collected during the testing procedure. Charts, such as the ones illustrated in FIGS. 8A and 8B, may be used to determine the energy levels at which to set the electron beam 400 so that the desired layers are penetrated by the electron beam. These charts are well known and widely available to those skilled in the art. FIG. 8A shows the depths to which an electron beam will penetrate as the electron beam energy level varies. FIG. 8B shows how the electron beam penetration depth varies with an element's atomic number while at a constant electron beam energy level. Typical electron beam energy levels range from 15 to 30 keV.

After the beam parameters are set for the specific specimen, each of the WDS X-ray detectors 500 are set to detect the photons which will emanate from the layers within the specimen in operation 620. That is, the detectors 500 are set to detect photons having specific X-ray energy levels. Ideally, one WDS 500 is set to detect photons having energy levels corresponding to the characteristic X-ray energy emission levels of each material in the film stack to be analyzed. Multiple detectors 500 may also be set to detect X-ray energies of a single material in order to detect each of the multiple characteristic emission levels of that specific material. Each emission level for a single material represents photons emitted as a result of an electron falling from a different electron shell (i.e., K, L, M, etc.). A WDS is set for a specific emission level by orienting a reflective surface 510 at a specific angle such that only X-ray photons centered around the desired energy level are directed at a sensor 520. The sensor 520 will then be able to collect photons for analysis purposes. The information collected by the detectors may be transmitted to processing system 320 which is connected to each detector 500. Processing system 320 will then perform the desired analysis.

After the electron beam 400 and the X-ray detectors 500 are properly set, the electron beam probe 400 is activated so that an electron beam impinges upon the semiconductor wafer 330 in operation 630. The electron beam penetrates at least one conductive layer and one liner layer, thereby, causing X-ray photons to emanate from the penetrated layers. X-ray photons emanating from each layer will be used to gain information about each of the respective layers. In operation 640, these X-rays are detected by the X-ray detectors 500. The number of X-rays at each characteristic emission energy level are counted. The number of X-rays counted is designated as the count for that particular emission level. FIGS. 9 and 10 show illustrative charts of the counts for the emission levels for a copper (Cu) K-shell emission and a tantalum (Ta) layer L-shell emission, respectively, wherein the Cu layer is formed on top of the Ta layer. The counts for each layer are illustrated for varying thickness values of the Cu layer. In FIG. 9, it can be seen that as the thickness of the Cu layer increases, so to does the count. In contrast, in FIG. 10, the count for Ta decreases as the thickness of the Cu layer increases since fewer X-ray photons are created as the Cu layer increases. Fewer X-ray photons for the Ta layer are created as the Cu layer increases in thickness because the electron beam penetrates to the Ta layer to a lesser degree as the Cu layer increases in thickness.

Data from the collected X-rays is saved by the processing system 320 in operation 650. The data is then analyzed in operation 660. Any suitable analysis technique may be used for

determining characteristics of the film stack based on X-ray emission at specific energy levels. For example, a regression routine may be used. The procedure for measuring film stack characteristics 600 is completed when the conductive layer characteristics are obtained through the regression routine. Alternative methods of analyzing the collected data may also
5 be used. For example, a series of calibration measurements are made, then measurement points between the calibration points are obtained through interpolation techniques.

FIG. 11 illustrates a flow diagram representing the procedure 1000 for determining particular film stack characteristic values. Generally, the procedure 1000 is a regressive technique where certain computational operations are repeated until a desired result is
10 obtained. The operations include generating predicted data (the counts) regarding the film stack layers by inputting estimated film stack characteristics, such as thickness and composition values, into equations which model X-ray emission from the film stack layers. In other words, X-ray emission results are calculated for a film stack having the input estimated film stack characteristics. Various estimated film stack values are repeatedly inputted into the
15 modeling equations until the resulting predicted data values closely match the data actually obtained from the X-ray micrography system.

Any suitable regression technique may be utilized to repeatedly generate x-ray emission predictions for a particular film stack model and match such predictions to the measured raw data. For example, the well known Monte Carlo regression technique may be
20 utilized. Monte Carlo techniques are useful for solving computationally complex equations, such as the above described equations. Another example of a regression technique that may be used is the Phi-Rho-Z model. Several software applications are available that automatically model films stacks with the Phi-Rho-Z model. For example, the Stratagem, available from Samx Guyan Court, in France, or the Citzaf, available from NIST (National
25 Institute of Standard and Technology), software packages may be used. Parameters that are relevant to x-ray emission are input into the software, along with the measured raw data. The software then repeatedly uses the model equations to produce predicted data until the predicted data matches the raw data. For this specific software application, the parameters include the raw data and starting estimated values for film compositions, film thickness,
30 landing energy of the electron beam, beam current, take-off angle, and detector efficiency. When the predicted data values (*e.g.*, output from the film stack model) closely match the raw data values, it is believed that the estimated film stack characteristics are a good estimate of

the actual film stack characteristics. The accuracy of this method, is of course, limited by the ability of the modeling equations to accurately predict the characteristics of the actual specimen.

As shown in FIG. 11, raw data is initially obtained from the X-ray micrography system, for example, in operation 1010. In operation 1020, a first set of estimated film stack characteristics values are selected to be inputted into the modeling equations. In operation 1030, the equations are solved according to the estimated characteristic values in order to generate a set of predicted data values. In operation 1040, the raw data and the predicted data are compared. If the difference between the respective values is less than a certain margin of error, then the estimated film stack characteristic values are an acceptable estimate of the actual film stack characteristics. However, if the difference between the respective values are greater than the margin of error, then a new set of estimated film stack characteristics are selected. The regression operations (i.e., 1020, 1030 and 1040) continue until the difference in data values is less than the estimated margin of error; which is represented in operation 1050. A margin of error should be approximately equal to or less than 0.5% for acceptable estimates of film stack characteristics.

While this invention has been described in terms of several preferred embodiments, there are alteration, permutations, and equivalents which fall within the scope of this invention. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. It is therefore intended that the following appended claims be interpreted as including all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

CLAIMS

We claim:

- 1 1. An apparatus for measuring film stack characteristics of a sample, the
2 apparatus comprising:
3 a beam generator configurable to direct a charged particle beam towards the
4 sample such that the charged particle beam penetrates at least two layers of the
5 film stack, the charged particle beam causing X-rays to emanate from the sample;
6 and
7 a first X-ray detector positioned above the sample so as to detect at least a
8 portion of the X-rays emanating from the sample.
- 1 2. The apparatus as recited in claim 1 wherein the first X-ray detector is
2 configured to detect X-rays of a specific energy level.
3
- 1 3. The apparatus as recited in claim 1 wherein the first X-ray detector is a
2 wavelength dispersive system.
3
- 1 4. The apparatus as recited in claim 3 wherein the wavelength dispersive system
2 contains a reflective surface and a sensor, the reflective surface configured to direct
3 X-rays of a predetermined energy level to the sensor.
4
- 1 5. The apparatus as recited in claim 1 further comprising a second X-ray
2 detector, wherein the first and second X-ray detectors are wavelength dispersive
3 systems.
4

1 6. The apparatus as recited in claim 1 wherein a conductive film layer and a liner
2 film layer are two of the at least two layers that are penetrated by the charged particle
3 beam.

4
5 7. The apparatus as recited in claim 1 further comprising a processor linked to
6 the beam generator and to the first X-ray detector.

7
1 8. The apparatus as recited in claim 7 wherein the processor is configured to
2 control the first X-ray detector so that it detects X-rays of a specific energy level.

3
1 9. The apparatus as recited in claim 7 wherein the processor is configured to
2 control the beam generator so that the charged particle beam directed to the sample
3 penetrates at least a conductive film layer and a liner film layer of the sample.

4
1 10. An apparatus for measuring film stack characteristics of a sample, the
2 apparatus comprising:

3 a beam generator configurable to direct a charged particle beam towards the
4 sample such that the charged particle beam penetrates at least two layers of the film
5 stack, the charged particle beam causing X-rays to emanate from the sample; and

6 at least two X-ray detectors positioned above the sample so as to detect at least
7 a portion of the X-rays emanating from the sample, each of the X-ray detectors
8 configured to detect X-rays having a specific energy level.

1
2 11. A method for measuring at least one characteristic of a film stack on a sample,
3 the method comprising:

4 directing a charged particle beam towards the sample such that the charged
5 particle beam penetrates at least two layers of the film stack, the charged particle
6 beam causing X-rays to emanate from the sample; and

7 detecting at least a portion of the X-rays emanating from the sample using a
8 first X-ray detector which is positioned above the sample.

9

1 12. The method for measuring as recited in claim 11, further comprising
2 configuring the first X-ray detector to detect X-rays of a specific energy level.

3

1 13. The method for measuring as recited in claim 11 wherein the first X-ray
2 detector is a wavelength dispersive system.

3

1 14. The method for measuring as recited in claim 13 further comprising
2 positioning a reflective surface contained within the wavelength dispersive system in
3 an orientation to direct X-rays of a predetermined energy level to a sensor contained
4 within the wavelength dispersive system.

5

1 15. The method for measuring as recited in claim 11 further comprising detecting
2 at least a portion of the X-rays emanating from the sample using a second X-ray
3 detector, wherein the first and second X-ray detectors are wavelength dispersive
4 systems.

5

1 16. The method for measuring as recited in claim 11, the method further
2 comprising selecting a charged particle beam energy and a charged particle beam
3 current at which the charged particle beam will be produced.

4

1 17. The method for measuring as recited in claim 11, the method further
2 comprising:

3 collecting data resulting from the detected X-rays; and

4 analyzing the data to determine film stack characteristics.

5

1 18. The method for measuring as recited in claim 11 wherein a conductive film
2 layer and a liner film layer are two of the at least two layers that are penetrated by the
3 charged particle beam.

4
5 19. A computer-readable medium comprising computer code for measuring at
6 least one characteristic of a film stack on an sample, the computer-readable medium
7 comprising:

8 selecting a charged particle beam energy and a charged particle beam current
9 at which a charged particle beam will be produced;

10 controlling the charged particle beam which is directed towards the sample
11 such that the charged particle beam penetrates at least two layers of the film stack, the
12 charged particle beam causing X-rays to emanate from the sample;

13 receiving data from at least two X-ray detectors, each of the X-ray detectors
14 configured to detect at least a portion of the X-rays emanating from the sample; and

15 analyzing the data to determine one or more film stack characteristics.
16

1 20. The computer-readable medium as recited in claim 19 wherein a conductive
2 film layer and a liner film layer are two of the at least two layers that are penetrated
3 by the charged particle beam.

4
5 21. A method of determining film stack characteristic values of a sample, the
6 method comprising:

7 obtaining raw data related to the film stack characteristic values from a
8 wavelength dispersive system which detects X-rays emanating from the sample;

9 selecting a set of estimated film stack characteristic values;

10 obtaining predicted data by solving equations which model a film stack
11 configuration using the set of estimated film stack characteristic values;

12 comparing the predicted data against the raw data;

13 selecting a new set of estimated film stack characteristic values when the
14 difference between the predicted data and the raw data is larger than a predetermined
15 margin of error; and

16 obtaining a new set of predicted data by solving equations which model the
17 film stack configuration using the new set of estimated film stack characteristic values
18 when the difference between the predicted data and the raw data is larger than the
19 predetermined margin of error.

20

1 22. The method of determining film stack characteristic values as recited in claim
2 21 further comprising recording the set of estimated film stack characteristic values
3 when the difference between the predicted data and the raw data is equal to or smaller
4 than the predetermined margin of error.

5

6 23. The method of determining film stack characteristic values as recited in claim
7 21 wherein the raw and predicted data represent a count value of X-rays having a
8 specific energy level, the count value being the total number of X-rays received by the
9 wavelength dispersive system over a period of time.

10

1 24. The method of determining film stack characteristic values as recited in claim
2 21 wherein the estimated film stack characteristic values represent a thickness and a
3 composition of at least two layers within the film stack.

4

1 25. The method of determining film stack characteristics as recited in claim 24
2 wherein a conductive layer and a liner layer are two of the at least two layers within
3 the film stack.

4

1 26. A computer-readable medium comprising computer code for determining film
2 stack characteristic values of a sample, the computer-readable medium comprising:
3 obtaining raw data related to the film stack characteristic values from a
4 wavelength dispersive system which detects X-rays emanating from the sample;
5 selecting a set of estimated film stack characteristic values;
6 obtaining predicted data by solving equations which model a film stack
7 configuration using the set of estimated film stack characteristic values;
8 comparing the predicted data against the raw data;
9 selecting a new set of estimated film stack characteristic values when the
10 difference between the predicted data and the raw data is larger than a predetermined
11 margin of error; and
12 obtaining a new set of predicted data by solving equations which model the
13 film stack configuration using the new set of estimated film stack characteristic values
14 when the difference between the predicted data and the raw data is larger than the
15 predetermined margin of error.

1 27. The computer-readable medium as recited in claim 26 further comprising
2 recording the set of estimated film stack characteristic values when the difference
3 between the predicted data and the raw data is equal to or smaller than the
4 predetermined margin of error.

5

6 28. The computer-readable medium as recited in claim 26 wherein the raw and
7 predicted data represent a count value of X-rays having a specific energy level, the
8 count value being the total number of X-rays received by the wavelength dispersive
9 system over a period of time.

10

1 29. The computer-readable medium as recited in claim 26 wherein the estimated
2 film stack characteristic values represent a thickness and a composition of at least two
3 layers of the film stack.

1 30. The computer-readable medium as recited in claim 29 wherein a conductive
2 layer and a liner layer are two of the at least two layers of the film stack.

3

4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223

FILM THICKNESS MEASUREMENT USING ELECTRON-BEAM INDUCED X-RAY MICROANALYSIS

ABSTRACT OF THE DISCLOSURE

5 An X-ray microanalysis test system comprising a beam generator which induces X-rays to emanate from a semiconductor device containing film stacks. The charged particle beam will penetrate at least two layers of a film stack on a semiconductor device so that these layers may be tested. The X-rays will be detected using multiple X-ray detectors that detect X-ray photons having a specific energy level. The X-rays will then
10 be used to analyze the characteristics of the semiconductor device. Each of the multiple X-ray detectors may be wavelength dispersive system (WDS) detectors. The present invention also provides a method for measuring film stack characteristics on a semiconductor device. The method for measuring includes directing an electron beam towards the semiconductor device so that the electron beam penetrates at least a
15 conductive film layer and a liner layer, detecting the X-rays which are caused to emanate from the device with multiple X-ray detectors that detect X-ray photons having a specific energy level. The present invention also provides a method and a computer-readable medium which determines a film stack's properties using the data collected with the test system of the present invention. The method and computer-readable medium includes
20 selecting a set of values which estimate the film stack characteristics, using the estimated values to generate predicted data by solving equations which model the film stack, and selecting a new set of estimated film stack characteristic values when the difference between the predicted data and the raw data is larger than a certain margin of error.

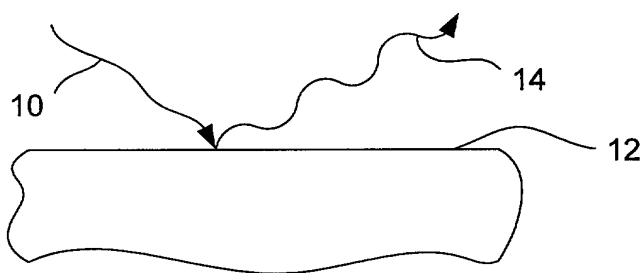


FIG. 1

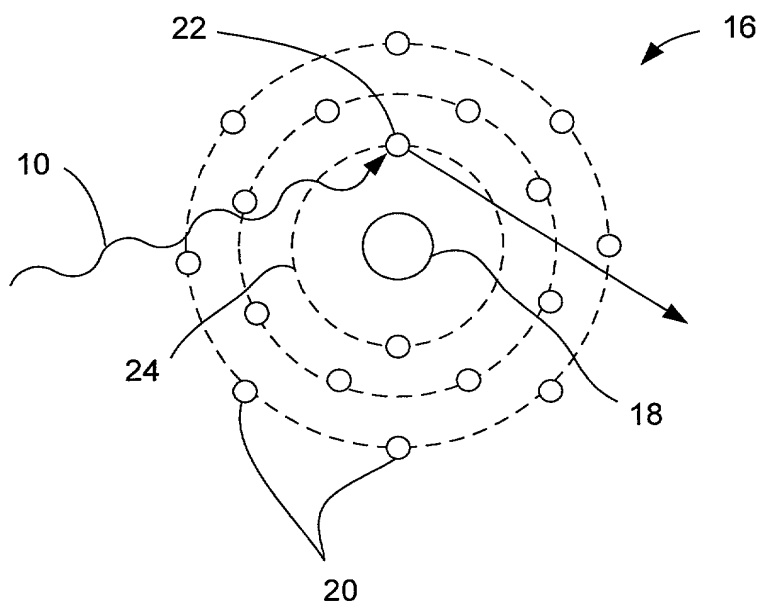


FIG. 2A

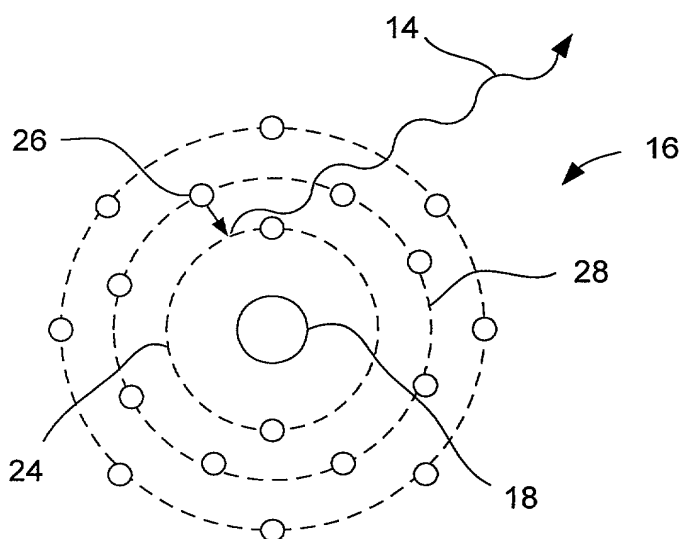


FIG. 2B

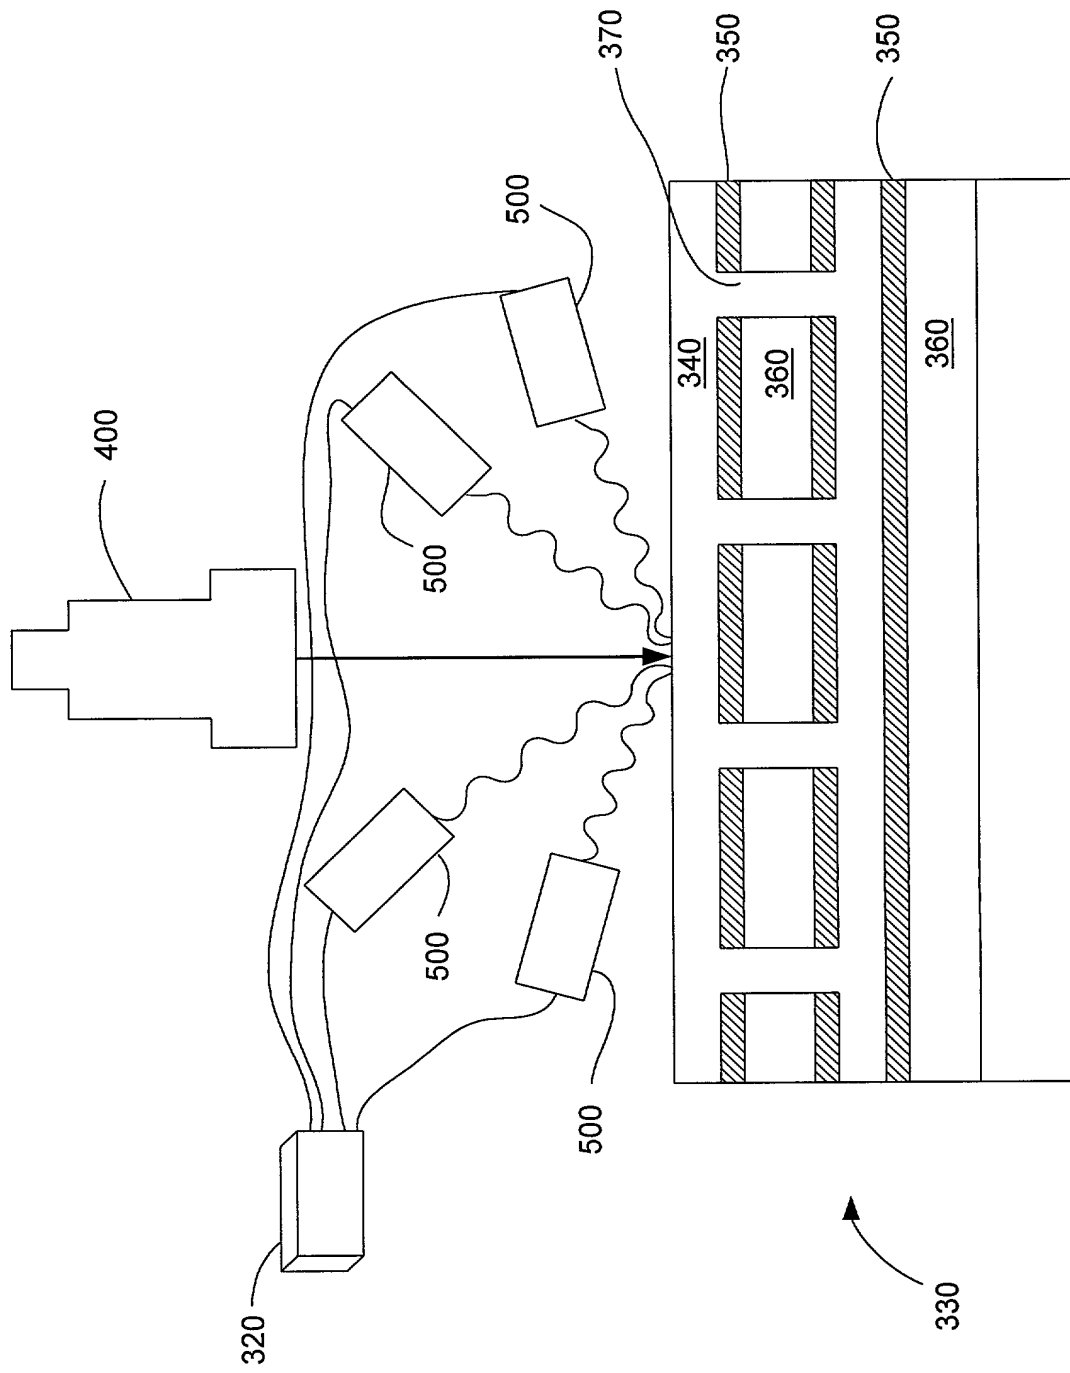


FIG. 3

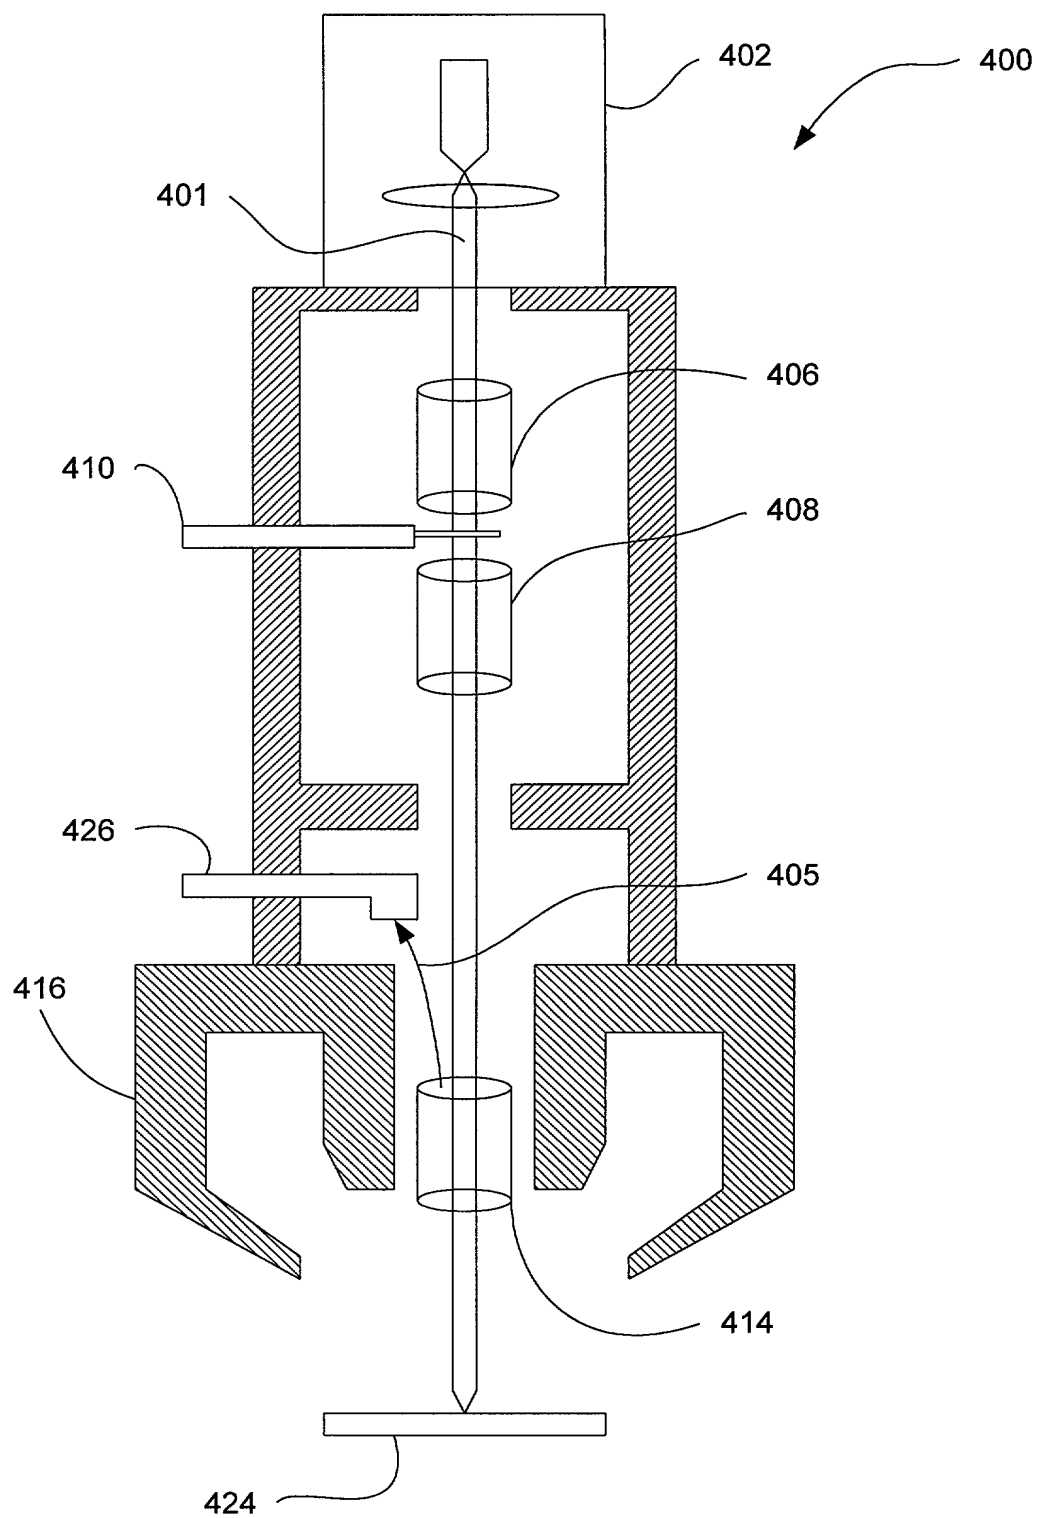


FIG. 4

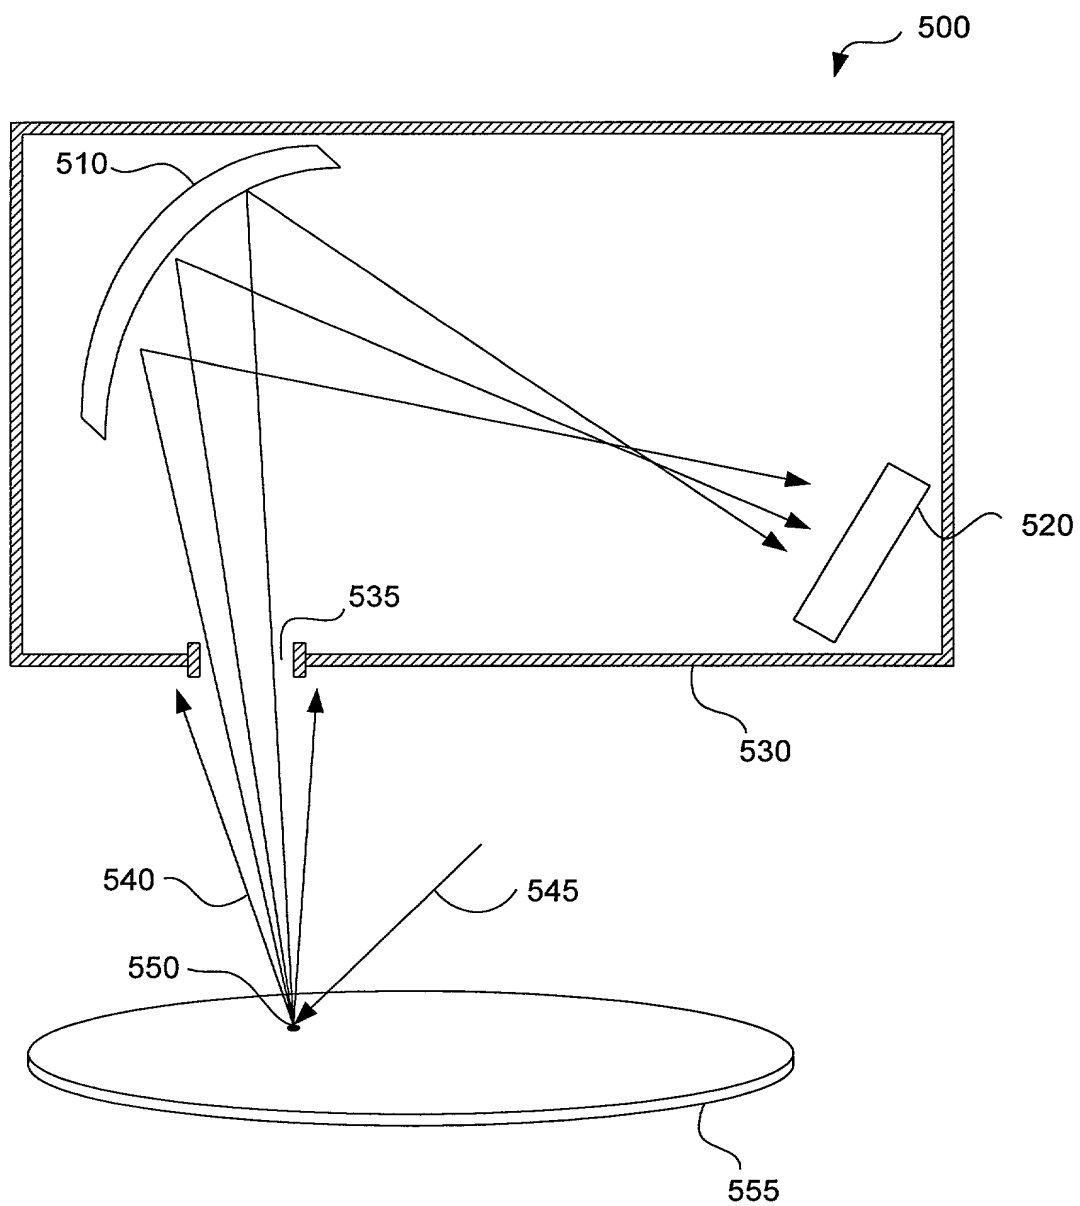


FIG. 5

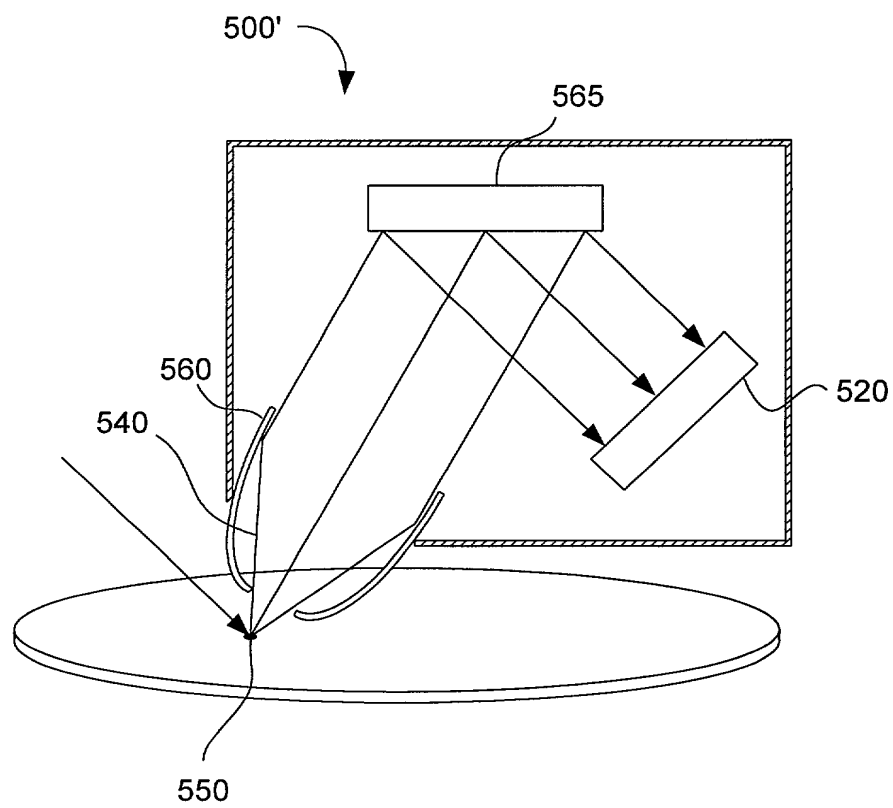


FIG. 6

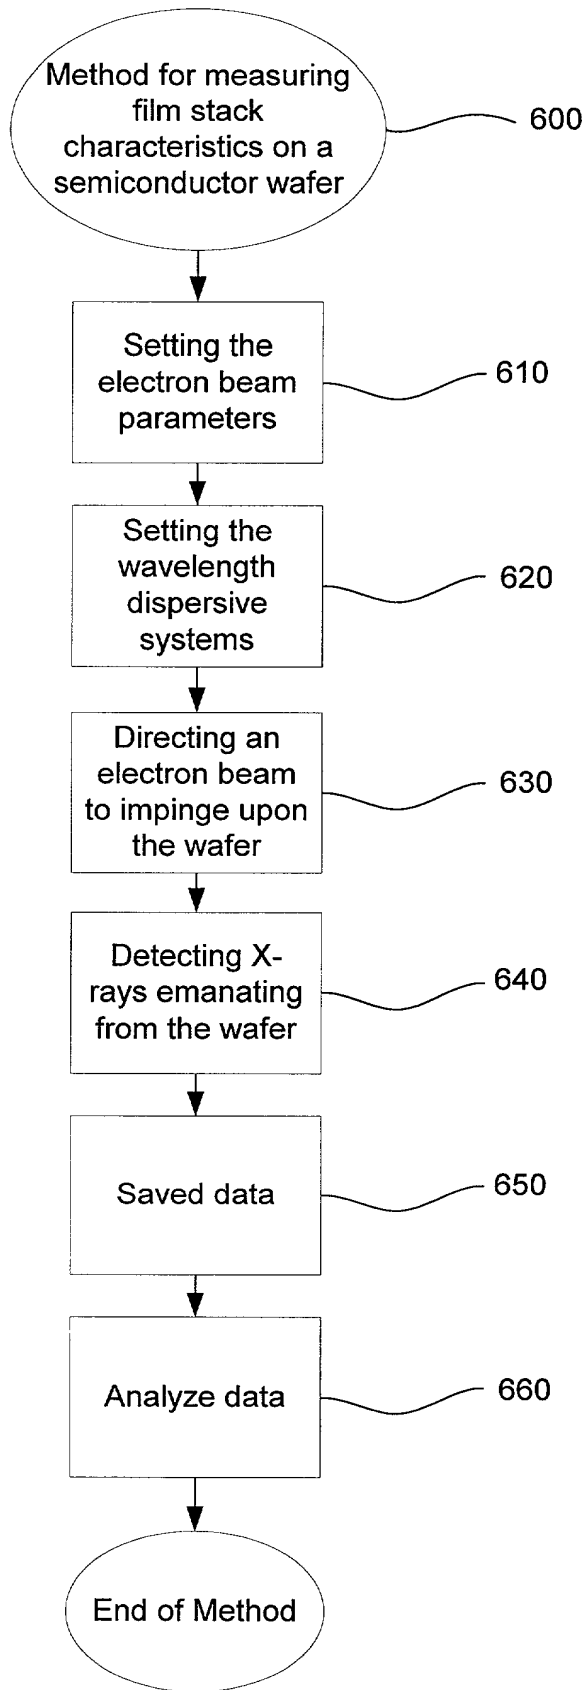


FIG. 7

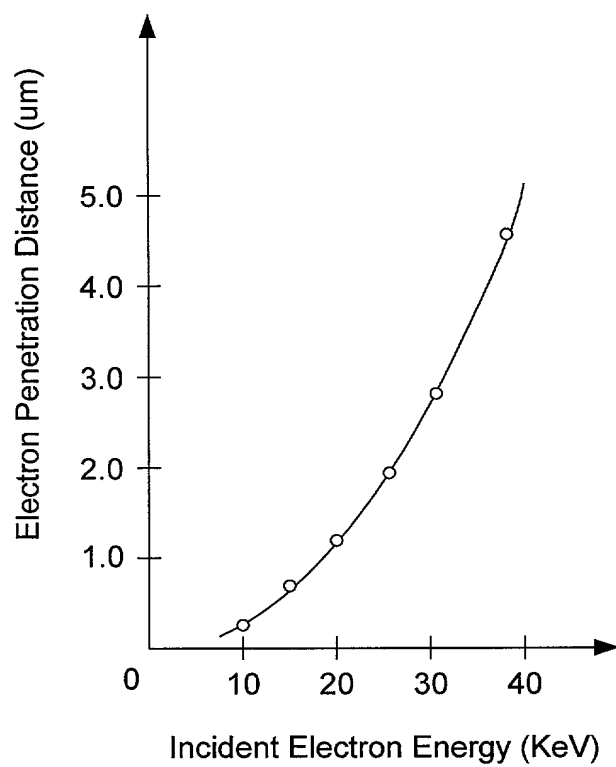


FIG. 8A

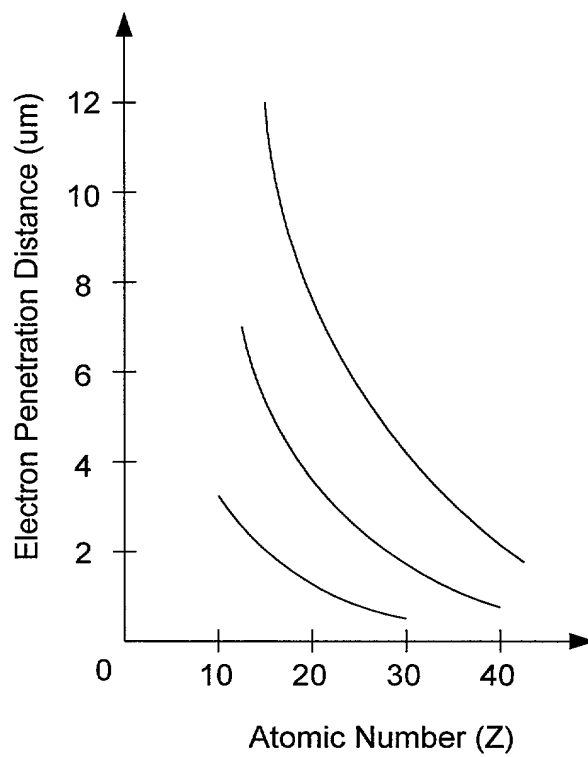


FIG. 8B

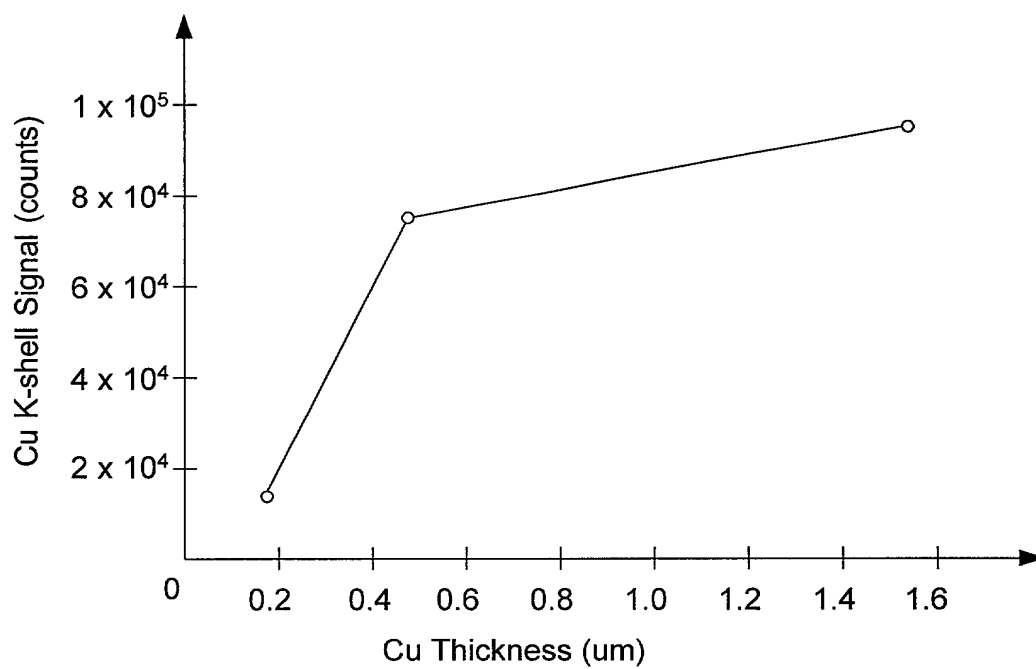


FIG. 9

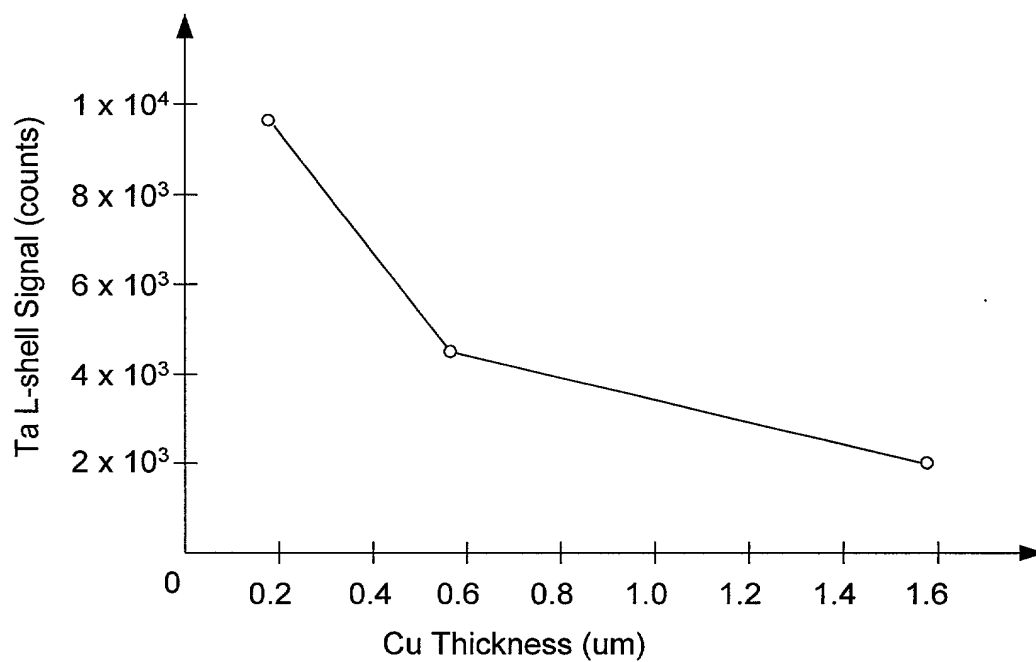


FIG. 10

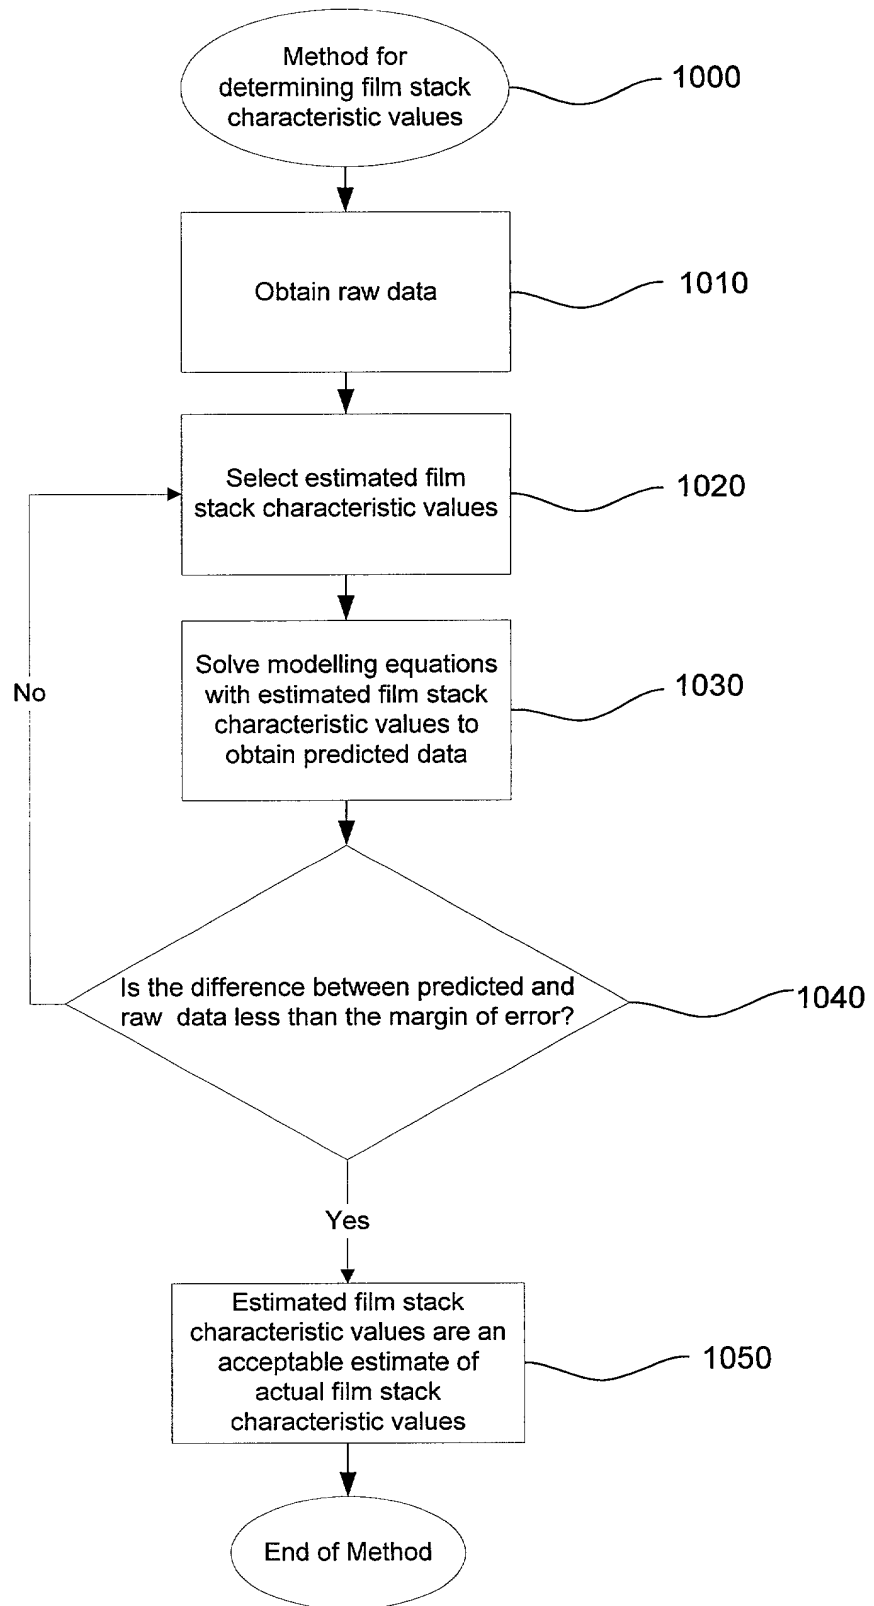


FIG. 11